


P.T.O.
3000 r.p.m. - IP 23 2 poles Compound

GA AGRIPLUS 3-18

Technical data

Three-phase 400V - 50Hz Mono-phase 230V - 50Hz

Power	kVA	18	7.2
Active power	kW	14.4	5.76
Current	%	85.4	
Gear box	Ratio	1:6.9	
Driving power	kW	16.9	
Tractor power	HP	55	
P.T.O. speed	r.p.m.	430	
P.T.O. sizing Cardan	Nm	562	
	kW	32	
Dimensions (LxWxH)	Mm	929 x 640 x 915	
Weight	Kg	134	



Environmental conditions

Temperature	°C	25
Relative humidity	%	30
Maximum altitude	Mt	1000

EQUIPMENT

Alternator stabilized, high performance
Gear box
Raised chassis
3-point-connection frame
Control panel
EC Protections

CONTROL PANEL ON BOARD

Instruments

Voltmeter
Frequencymeter

Protections

Single phase thermal protection
4-pole magnetothermal switch
Differential protection (Id=0,03A)
IP65 cover


Outputs

1 CEE 400V (3P+N+E) 32A
1 CEE 230V (2P+E) 16A

DOCUMENTATION

User and maintenance manual
EC Declaration of Conformity

APPLICATIONS

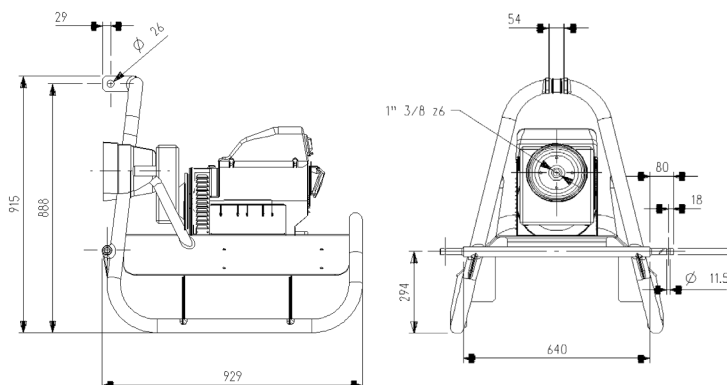

AGRICULTURAL

