



## Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.

Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

## Design for Standby Power Applications

### 【Design Life】

Up to 5 Years in Standby Service at 25°C

Eurobat (20°C) : 3-5 years, Standard Commercial

### 【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)

Discharge : -15°C ~ 50°C (5°F~122°F)

Charge: -15°C ~ 40°C (5°F~104°F)

Storage: -15°C ~ 40°C (5°F~104°F)

### 【Float Charging Voltage】

13.5 ~ 13.8 VDC/Unit at 25°C (77°F)

### 【Equalization Charging Voltage】

14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

### 【Self Discharge】


Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);

Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

## Specification

Design according with IEC 61056-1/2:2012

|                           |                                                                 |                             |
|---------------------------|-----------------------------------------------------------------|-----------------------------|
| Nominal Voltage           | 12V (6 cells per unit)                                          |                             |
| Nominal Capacity          | 51W @15min-rate to 1.67V per cell @25°C (77°F)                  |                             |
| Weight                    | Approx. 3.85 Kg (8.49 lbs)                                      |                             |
| Maximum Discharge Current | 180A (5sec)                                                     |                             |
| Internal Resistance       | Approx. 13.6 mΩ                                                 |                             |
| Short Circuit Current     | 462A                                                            |                             |
| Maximum Charge Current    | 5.1A                                                            |                             |
| Terminal types            | F2-Faston Tab250                                                |                             |
| Terminal breaking Torque  | --                                                              |                             |
| Container Material        | ABS (UL 94-HB) & Flame Retardant (94-V0) available upon request |                             |
| Dimensions                | Length (L)                                                      | 151.0±2.0 mm 5.94±0.08 inch |
|                           | Width (W)                                                       | 98.0±1.0 mm 3.86±0.04 inch  |
|                           | Container Height (h)                                            | 94.1±1.0 mm 3.70±0.04 inch  |
|                           | Overall Height (H)                                              | 100.3±1.5 mm 3.95±0.06 inch |

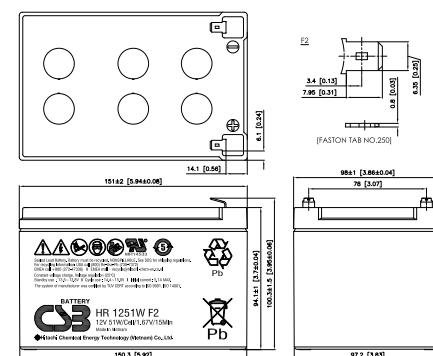

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

| F.V/Time | 2MIN | 4MIN | 5MIN | 6MIN | 8MIN | 10MIN | 15MIN | 20MIN | 30MIN | 45MIN | 60MIN | 90MIN |
|----------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V    | 85.8 | 64.0 | 56.4 | 50.8 | 43.0 | 36.8  | 27.1  | 21.4  | 15.4  | 10.9  | 8.33  | 6.65  |
| 1.67V    | 82.4 | 61.6 | 54.4 | 49.2 | 41.8 | 35.8  | 26.7  | 20.9  | 15.3  | 10.8  | 8.29  | 6.61  |
| 1.70V    | 80.5 | 60.5 | 53.3 | 48.0 | 41.2 | 35.2  | 26.4  | 20.7  | 15.2  | 10.7  | 8.28  | 6.58  |
| 1.75V    | 77.2 | 57.9 | 51.3 | 46.4 | 39.9 | 34.3  | 25.7  | 20.3  | 15.1  | 10.6  | 8.24  | 6.52  |
| 1.80V    | 72.9 | 54.8 | 48.9 | 44.6 | 38.3 | 32.9  | 24.8  | 19.9  | 14.9  | 10.5  | 8.20  | 6.44  |
| 1.85V    | 68.6 | 51.6 | 46.5 | 42.7 | 36.5 | 31.6  | 23.9  | 19.6  | 14.7  | 10.4  | 8.16  | 6.36  |

### Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

| F.V/Time | 2MIN | 4MIN | 5MIN | 6MIN | 8MIN | 10MIN | 15MIN | 20MIN | 30MIN | 45MIN | 60MIN | 90MIN |
|----------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|
| 1.60V    | 1030 | 768  | 675  | 607  | 511  | 441   | 325   | 257   | 185   | 130   | 100   | 79.8  |
| 1.67V    | 990  | 742  | 651  | 585  | 500  | 430   | 320   | 251   | 184   | 129   | 99.6  | 79.4  |
| 1.70V    | 969  | 726  | 637  | 573  | 494  | 422   | 317   | 249   | 183   | 128   | 99.3  | 79.0  |
| 1.75V    | 927  | 695  | 612  | 552  | 479  | 408   | 310   | 244   | 181   | 127   | 98.9  | 78.3  |
| 1.80V    | 875  | 657  | 585  | 532  | 460  | 393   | 300   | 239   | 179   | 126   | 98.4  | 77.3  |
| 1.85V    | 824  | 619  | 558  | 513  | 441  | 379   | 290   | 235   | 177   | 125   | 97.9  | 76.4  |

Please refer to the official site for the latest rating confirmation. URL: [www.csb-battery.com](http://www.csb-battery.com)

Issued: 180205

## Sales Offices

**日立化成能源科技股份有限公司**  
Hitachi Chemical Energy Technology Co., Ltd.

### BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600

Fax: +886-2-2888-3300

### USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)

Fax: +1-817-244-4445

### SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488, 8831-6775

Fax: +86-755-8831-6075

### EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140

Fax: +31(0)180-418-327

### SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622, 5046-0833

Fax: +86-21-5046-1046

### TAIPEI OFFICE

Tel: +886-2-2880-5600

Fax: +886-2-2888-3300

### BEIJING OFFICE (CHINA)

Tel: +86-10-5820-5336, 5820-5338

Fax: +86-10-5820-3053

Recognized under UL 1989,  
and certified by ISO 9001, 14001.

